



Installation and setting instructions

Keypad Type MA10

Publication number II017/1211

Important

These instructions must remain with the product to ensure correct installation. If extra copies are required please contact Dewhurst UK Manufacturing Ltd and quote publication number and issue


If you have any problems or questions, please contact our technical support desk direct on **+44 (0)20 8744 8283/8227/8240** during office hours.

Dewhurst UK Manufacturing Ltd

Unit 9, Hampton Business Park - Feltham - TW13 6DB - UK

Tel: +44 (0)20 8744 8200 Fax: +44 (0)20 8744 8299

Email: info@dewhurst.co.uk www.dewhurst.co.uk

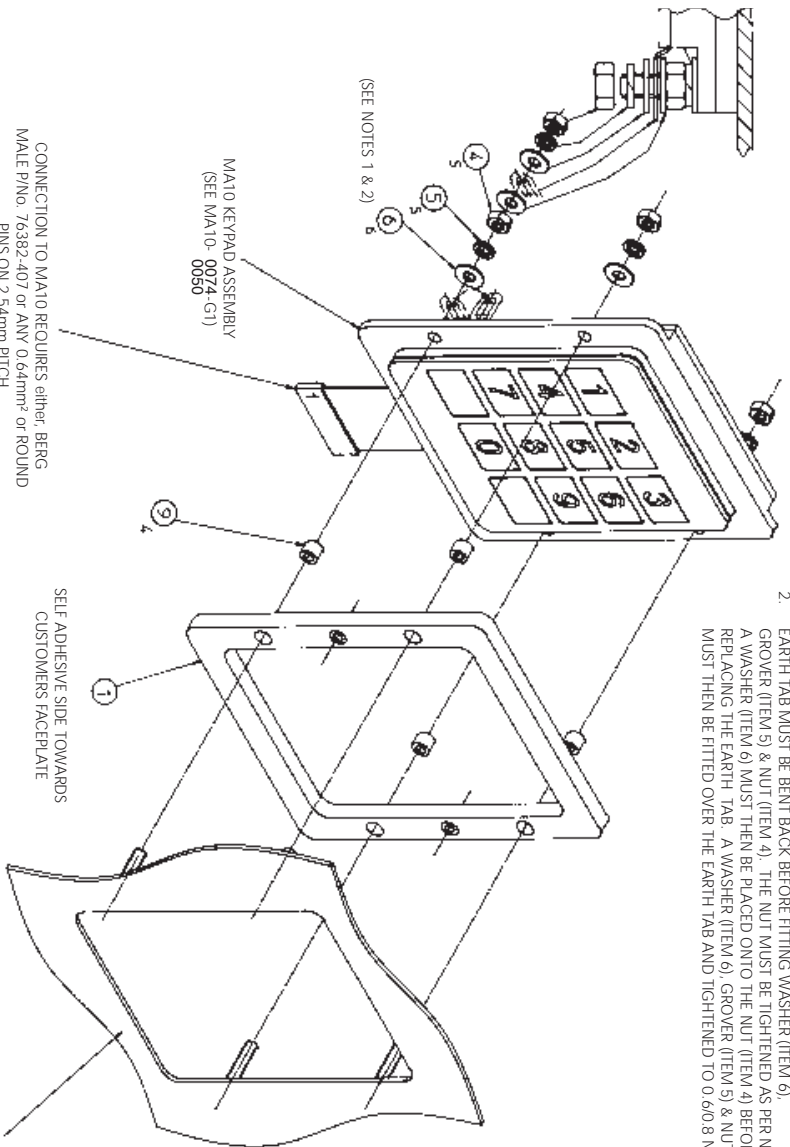

NOTES:

1. FIXING NUTS (ITEM 4) TO BE TIGHTENED TO TORQUE 1.3/1.5 Nm BEFORE FITTING THE EARTH TAB
2. EARTH TAB MUST BE BENT BACK BEFORE FITTING WASHER (ITEM 6), GROVER (ITEM 5) & NUT (ITEM 4). THE NUT MUST BE TIGHTENED AS PER NOTE 1. A WASHER (ITEM 6) MUST THEN BE PLACED ONTO THE NUT (ITEM 4) BEFORE REPLACING THE EARTH TAB. A WASHER (ITEM 6), GROVER (ITEM 5) & NUT (ITEM 4) MUST THEN BE FITTED OVER THE EARTH TAB AND TIGHTENED TO 0.6/0.8 Nm.

(SEE NOTES 1 & 2)

MA10 KEYPAD ASSEMBLY
(SEE MA10-0074 G1)

CONNECTION TO MA10 REQUIRES EITHER, BERG
MALE PIN/NO. 76382-407 or ANY 0.64mm² or ROUND
PINS ON 2.54mm PITCH

SELF ADHESIVE SIDE TOWARDS
CUSTOMERS FACEPLATE

CUSTOMERS STAINLESS STEEL FACEPLATE
(CUTOUT & MOUNTING STUDS AS PDO3088 SHEET 1.3)

MA10 FACEPLATE FIXING KIT