FASTFIT FIXTURES

Landing Operating Panel — 307mm height

PP LOP 100 307 UA

Profile Plus — 100mm width — UA Up Arrow

Order Guide

P	**Profile** - Category 1 Vandal Resistant	Depth 23mm	Corner Profile	
PP	**Profile Plus** - Category 2 Vandal Resistant	Depth 25mm	End Profile	

LOP **Landing Operating Panel** - Brushed Stainless Steel
Complete with EN-Buzz

75 **100** **125** **Width** of fixture (mm)

307 **607** **Height** of fixture (mm) - Please note the 75 LOP is 300mm height

Pushbuttons US91-EN Compact 3P
Single Red Illumination 24V - 2 N/O Contacts

UA	Up Arrow
UA+DA	Up & Down Arrow
DA	Down Arrow

e.g	PP	LOP	100	307	UA+DA
		LOP			
		LOP			
		LOP			
		LOP			
		LOP			

A simple order code relates to a pre-assembled fixture, no hidden extras. US91 EN pushbuttons and EN-Buzz are standard for both terminal and intermediate LOPs.

Pre-prepared drawings and stock holding will ensure a Fast and Fit Fixture service from the UK's leading component manufacturer.

Contact our sales office or your local sales engineer for more information

0208 744 8200 | orders@dewhurst.co.uk | info@dewhurst.co.uk | www.dewhurst.co.uk

Paul Thienel	South UK Sales	07500 843 857	pthienel@dewhurst.co.uk
Gary Newland	North UK Sales	07900 240 071	gnewland@dewhurst.co.uk
Neil Gardner	MEAE Sales	07584 216 759	ngardner@dewhurst.co.uk

Available as a PDF download from www.dewhurst.co.uk

Orders Subject to Dewhurst UK Ltd terms and conditions of sale.
All quotations are subject to VAT, unless otherwise stated.

dewhurst

FASTFIT FIXTURES

LOP Landing Operating Panels

FASTFIT FOR A QUICK OFF THE SHELF SERVICE

- New Profile Plus range
- Pre-approved drawing
- Pre-assembled fast turnaround
- DDA compliant to EN81-70
- Compatible with most controllers
- Simple order codes

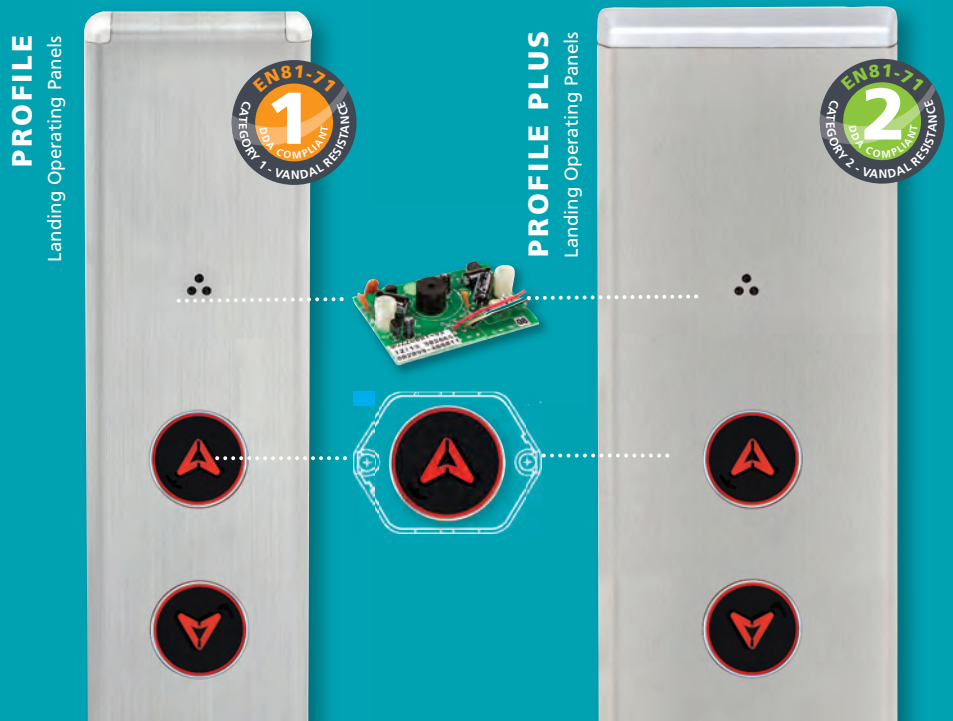

FASTFIT FOR A QUICK OFF THE SHELF SERVICE

LOP Landing Operating Panels

This service has been designed to make the sourcing process as easy as possible. Our simple order code relates to a pre-assembled fixture which comes complete with US91-EN pushbuttons and an EN-Buzz.

A clear pricing structure, pre-prepared drawings and stock holding of the most popular ranges will ensure a Fast and Fit Fixture service.

Pushbuttons
US91-EN Compact 3P
Single Red Illumination 24V - 2 N/O Contacts

Direction codes

UA
Up Arrow

DA
Down Arrow

UA+DA
Up and Down Arrow

VANDAL RESISTANCE CATEGORIES

EN81-71 outlines three categories of vandal resistance and the testing required to meet each category is defined to ensure that fixtures remain functional and safe after acts of vandalism occur.

Category 0 – Fixtures need to comply with the requirements of EN81-1:1998 or EN81-2:1998

Category 1 – In addition to the requirements of Cat 0, fixtures must be secured with tamperproof fixings. Fixtures must be able to withstand three impacts from a 1kg impactor, from a height of 0.2m at the weakest point. Fixtures must be able to withstand a flame applied to the area most likely to be affected for 60 seconds.

Category 2 – In addition to the requirements of Cat 0 fixtures must be secured with fixings which are not visible to lift users. Fixtures must be able to withstand three impacts from a 1kg impactor from a height of 1.0m at the weakest point. Fixtures must be able to withstand a flame applied to the area most likely to be affected for 120 seconds.

PROFILE Landing Operating Panel

Category 1 Vandal Resistance

The Profile range of LIP's provide a simple, stylish solution for surface mount stations. 23mm (Corner) deep profile stations.

Fully assembled with:
- US91-EN Compact 3P
- EN-Buzz

PROFILE

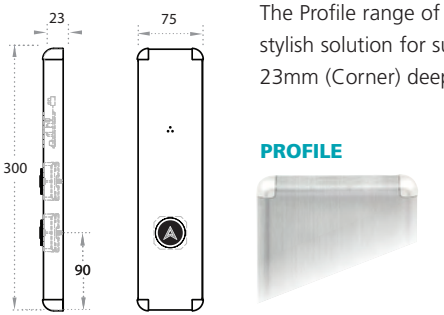

P LOP 75 300 - Direction code
75mm wide **x 300**mm height

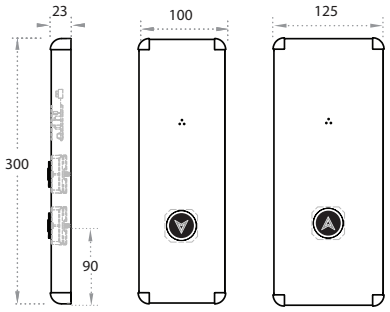

P LOP 100 307 - Direction code
100mm wide **x 307**mm height

P LOP 125 307 - Direction code
125mm wide **x 307**mm height

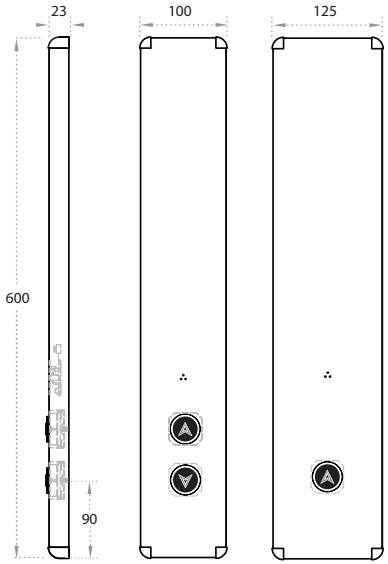

P LOP 100 600 - Direction code
100mm wide **x 600**mm height

P LOP 125 600 - Direction code
125mm wide **x 600**mm height

PROFILE PLUS Landing Operating Panel

Category 2 Vandal Resistance

The new Profile Plus range of LOP's provide a simple, stylish but very robust solution for surface mount stations. The end caps are fixed securely to the faceplate and with a heavy duty backplate the Profile Plus surface mount will stand up to even the harshest environment.

Fully assembled with:
- US91-EN Compact 3P
- EN-Buzz

PROFILE PLUS

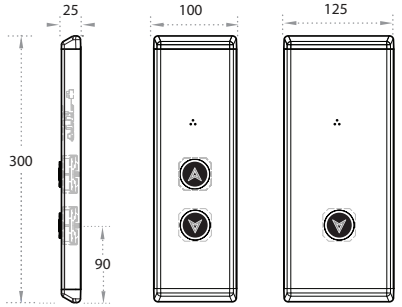

PP LOP 100 300 - Direction code
100mm wide **x 307**mm height

PP LOP 125 300 - Direction code
125mm wide **x 307**mm height

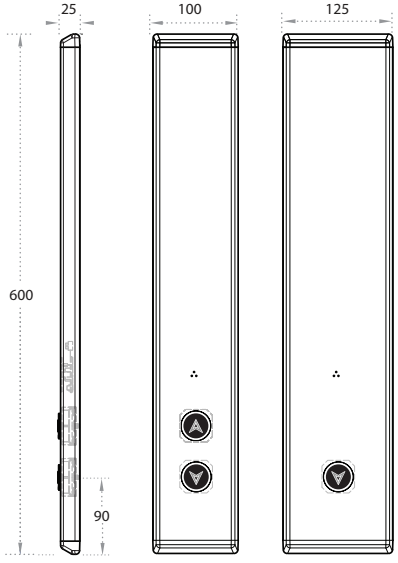

PP LOP 100 600 - Direction code
100mm wide **x 600**mm height

PP LOP 125 600 - Direction code
125mm wide **x 600**mm height